SUNHEARRT
CERAMIX

TILES | BATHWARE | ADHESIVE

COLLECTION
2026

60x120

FULLBODY TILES
15mm Thickness

SUNHEARRT INTRODUCTION

Path-breaking innovations with a Promise of quality!

Inspired in collection, and unmatched in design; Sunhearrt, a brand by Sunshine Tiles Company Pvt. Ltd., through its novel technology and product introductions, is leading the Ceramic industry to achieve a peerless national and global reputation in becoming a single-stop solution for any space amplification.

Penetrating the industry with an ever-expanding portfolio, Sunhearrt has now diversified its core strength of Ceramics, and Vitrified tiles into GVT/PVT, Porcelain, Sanitaryware, as well as a range of complete Tiling Solutions.

Company strength and achievements that defines our place in the industry.

AMONG **TOP 10** CERAMIC BRANDS IN INDIA

ONE OF **THE LARGEST TILE EXPORTERS,** CONSECUTIVELY FOR THE LAST 6 YEARS

14+ SIZES under one roof + **14+ Unique Surfaces**

PRESENCE IN **83+ COUNTRIES**

28 MILLION SQM. MANUFACTURING CAPACITY/ANNUM

THE FIRST COMPANY IN THE CERAMIC INDUSTRY WITH **3-STAR EXPORT HOUSE**

1195+ BUSINESS PARTNERS

INVESTMENTS IN **RENEWABLE ENERGY**

Elevating spaces, uplifting surface experience!

Reshaping spaces by constantly enhancing surroundings with new possibilities. Sunhearrt promises the amalgamation of innovation and style, crafting high-end ceramic excellence. It is about taking space to a higher level, making it more appealing and adaptive.

Our focus lies in transcending the ordinary, where every tile, every design, echoes the essence of sophistication and durability. Sunhearrt stands as a beacon for those seeking not just elegance but an enduring legacy woven into the very fabric of their spaces.

Tiles

Flooring the extensions of your dream space, tiles from Sunhearrt are a great addition to every ambience. With their simplistic elegance and finesse, our tiles introduce modernity and grandeur by manufacturing the best alternatives and replacements to natural surfaces. This collection, thence, is the perfect choice for 'architecting' the spectacular!

Discover the blend of perfect tile size with textures that complement your space.

The versatile tile size of the world of ceramics paired 60x120cm with the innovation punch pro
and Liner Punch of the Fullbody Collection is the perfect recipe to craft spaces versatile in style and function. The colors, the punches, and the size altogether form a solution your spaces need.

ACHIEVE YOUR DREAM SPACE

Discover the blend of perfect tile size with textures that complement your space.

60x120cm

The versatile tile size of the world of ceramics paired 60x120cm with the innovation punch pro and Liner Punch of the Fullbody Collection is the perfect recipe to craft spaces versatile in style and function. The colors, the punches, and the size altogether form a solution your spaces need.

Innovatively Designed

The designs curated and etched on the tile's surface portray the cosmic-inspired details and are distinctive.

Classy Size

The larger format allows for more intricate details and a grander depiction of celestial elements.

Improved Features

The latest technology & techniques are used to enhance tiles' features with myriad of decor possibilities.

Higher Durability

High-quality material selection & improvised processes enhance tile's durability, making them withstand test of time.

SUNHEARRT
CERAMIX

60x120cm - FULLBODY

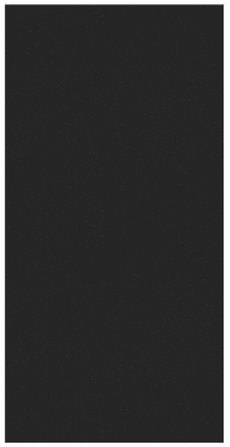

TERRASTONE DYNAMIC BLACK
Finish POLISHED
Random 1 Face

TERRASTONE DYNAMIC CHOCO
Finish POLISHED
Random 1 Face

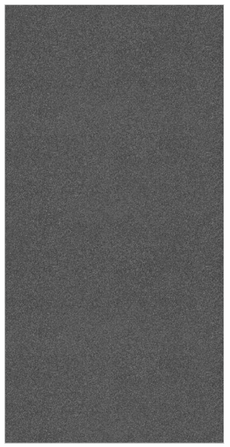

TERRASTONE DYNAMIC NERO
Finish POLISHED
Random 1 Face

TERRASTONE DYNAMIC CREMA
Finish POLISHED
Random 1 Face

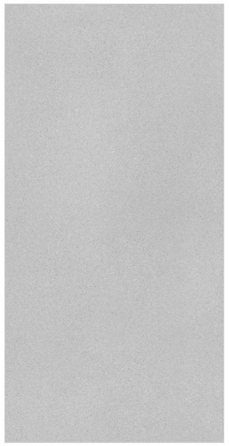

TERRASTONE DYNAMIC DOVE
Finish POLISHED
Random 1 Face

TERRASTONE DYNAMIC MONO WHITE
Finish POLISHED
Random 1 Face

TERRASTONE DYNAMIC DOVE

SUNHEARRT
CERAMIX

60x120cm - FULLBODY

TERRASTONE CANVAS QUARTZ

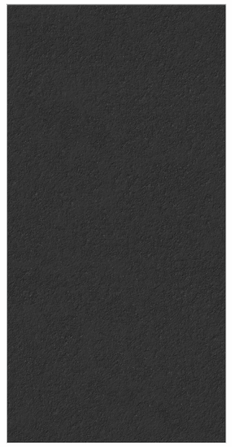

TERRASTONE CANVAS BLACK
Finish RUSTIC
Random 1 Face

TERRASTONE CANVAS CREMA
Finish RUSTIC
Random 1 Face

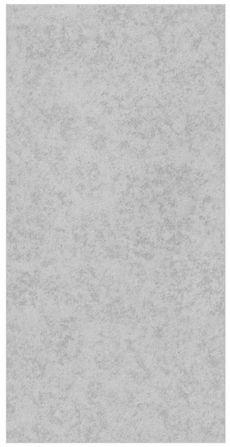

TERRASTONE CANVAS DOVE
Finish RUSTIC
Random 1 Face

TERRASTONE CANVAS IRIS
Finish RUSTIC
Random 1 Face

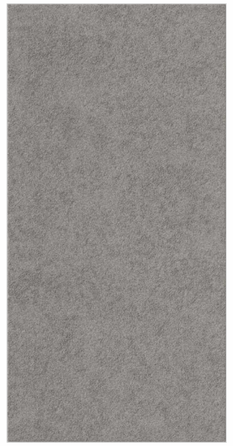

TERRASTONE CANVAS SILVER
Finish RUSTIC
Random 1 Face

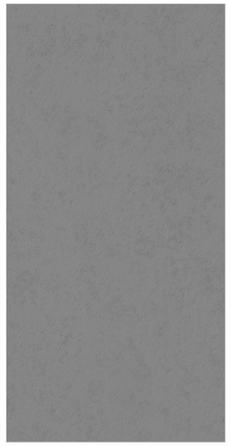

TERRASTONE CANVAS STEELGREY
Finish RUSTIC
Random 1 Face

TERRASTONE CANVAS QUARTZ
Finish RUSTIC
Random 1 Face

TERRASTONE CANVAS SNOW WHITE
Finish RUSTIC
Random 1 Face

TERRASTONE CANVAS WHITE
Finish RUSTIC
Random 1 Face

SUNHEARRT
CERAMIX

60x120cm - FULLBODY

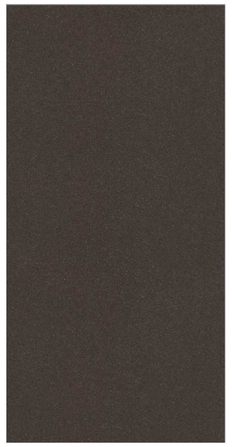

TERRASTONE ALMOND
Finish MATT
Random 1 Face

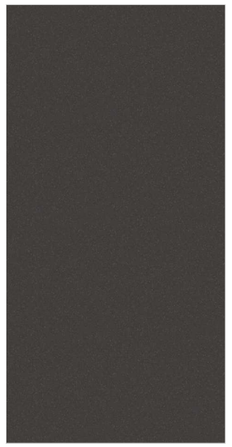

TERRASTONE CHOCO
Finish MATT
Random 1 Face

TERRASTONE CREMA
Finish MATT
Random 1 Face

TERRASTONE KOTA
Finish MATT
Random 1 Face

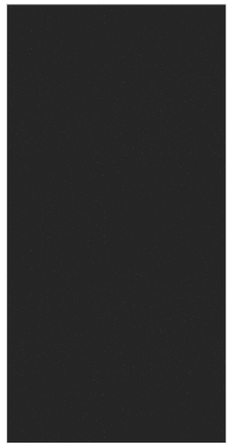

TERRASTONE BLACK
Finish MATT
Random 1 Face

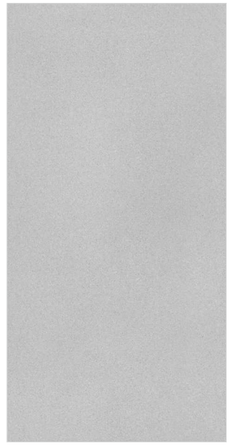

TERRASTONE DOVE
Finish MATT
Random 1 Face

TERRASTONE ROYAL STEEL GREY
Finish MATT
Random 1 Face

TERRASTONE PEACH
Finish MATT
Random 1 Face

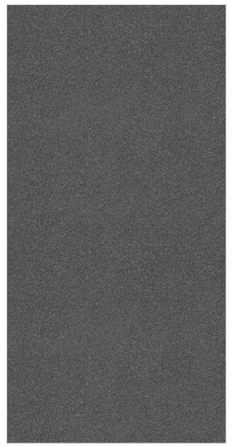

TERRASTONE NERO
Finish MATT
Random 1 Face

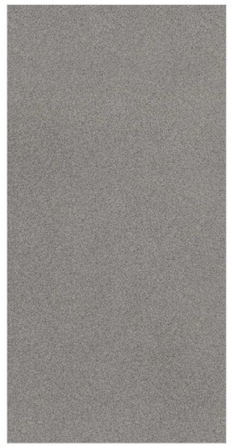

TERRASTONE SILVER
Finish MATT
Random 1 Face

TERRASTONE ROYAL IRIS
Finish MATT
Random 1 Face

TERRASTONE MONO WHITE
Finish MATT
Random 1 Face

TERRASTONE QUARTZ
Finish MATT
Random 1 Face

TERRASTONE WHITE
Finish MATT
Random 1 Face

TERRASTONE ROYAL SNOW WHITE
Finish MATT
Random 1 Face

TECHNICAL SPECIFICATION OF **FULLBODY (UNGLAZED)**

SR. NO.	CHARACTERISTICS	IS 15622:2017 Group Bla E ≤ 0.08	ISO 13006:2018 Group Bla Ev ≤ 0.5 %	EN 14411:2016 Group Bla Ev ≤ 0.5 %	SUNHEARRT VALUE	TEST METHOD
A - DIMENSION & SURFACE QUALITY						
i	Length & Width	±0.1%	± 0.3% OR ± 1.0 mm	± 0.6% OR ± 2.0 mm	< 0.1%	ISO 10545 - 2 IS 13630 (Part 1)
ii	Thickness	± 5.0%	± 5.0% OR ± 0.5 mm	± 5.0% OR ± 0.5 mm	< 5.0%	
iii	Straightness Of Side	±0.1%	± 0.3% OR ± 0.8 mm	± 0.5% OR ± 1.5 mm	< 0.1%	
iv	Rectengularity	±0.1%	± 0.3% OR ± 1.5 mm	± 0.5% OR ± 2.0 mm	< 0.1%	
v	Surface Flatness					
a	Center Curvature (%)	± 0.5%	± 0.4% OR ± 1.8 mm	± 0.5 % OR ± 2.0 mm	< 0.5 %	
b	Edge Curvature (%)	± 0.5%	± 0.4% OR ± 1.8 mm	± 0.5 % OR ± 2.0 mm	< 0.5 %	
c	Corner Warpage (%)	± 0.5%	± 0.4% OR ± 1.8 mm	± 0.5 % OR ± 2.0 mm	< 0.5 %	
vi	Surface Quality	Min. 95 % of tiles shall be free from visible defects	Min. 95 % of tiles shall be free from visible defects	Min. 95 % of tiles shall be free from visible defects	Min. 95 % of tiles will be free from visible defects	
B - PHYSICAL PROPERTIES						
i	Water Absorption	<0.08% Ind Max 0.1%	<0.5% Ind Max 0.6%	<0.5% Ind Max 0.6%	≤ 0.08 %	ISO 10545-3 IS 13630 (Part 2)
ii	Modulus Of Rupture [N/mm2]	Av 35, Individual 32 min	Av 35, Individual 32 min	Av 35, Individual 32 min	> 35	ISO 10545-4 IS 13630 (Part 6)
iii	Breaking Strength In N	700 for < 7.5mm thickness 1300 for ≥ 7.5mm thickness	700 for < 7.5mm thickness 1300 for ≥ 7.5mm thickness	700 for < 7.5mm thickness 1300 for ≥ 7.5mm thickness	>1300	
iv	Moisture Expansion In Mm/m	0.02, max	Test method available	Declared Value	< 0.02	ISO 10545-10 IS 13630 (Part 3)
v	Resistance To Abrasion of Glazed Tiles (Class I To V)	Not Applicable	Not Applicable	Not Applicable	Not Applicable	ISO 10545-7 IS 13630 (Part 11)
	Resistance To Deep Abrasion Of Unglazed Tiles (volume Removed In Mm^3)	Max-140	Max -175	Max -175	< 140	ISO 10545-6 IS 13630 (Part 12)
vi	Coefficient Of Linear Thermal Expansion From Embiant Temperature To 100 0 C	$6 X 10^{-6} K^{-1}$ max	Test method available	Declared Value	$< 6 X 10^{-6} K^{-1}$	ISO 10545-8 IS 13630 (Part 4)
vii	Thermal Shock Resistance	10 Cycle Passed	Test method available	Pass according to EN ISO 10545-1	Passed 10 cycle	ISO 10545-9 IS 13630 (Part 5)
viii	Crazing Resistance	Not Applicable	Not Applicable	Not Applicable	Not Applicable	ISO 10545-11 IS 13630 (Part 9)
ix	Impact Resistance	0.55, min	Declared Value	Declared Value	> 0.55	ISO 10545-5 IS 13630 (Part 14)
C - CHEMICAL PROPERTIES						
i	Stain Resistance	Min Class 2	Test method available	Declared Value	Min Class 2	ISO 10545-14 IS 13630 (Part 7)
ii	Resistance To Household Chemicals	Required, if agreed according to the chemical resistance class indicated by the manufacturer	Class UB	Min Class UB	Required, if agreed according to the chemical resistance class indicated by the manufacturer	ISO 10545-13 IS 13630 (Part 7)
iii	Resistance To Acid And Alkalies	Required, if agreed according to the chemical resistance class indicated by the manufacturer	Declared Value	Declared Value	Required, if agreed according to the chemical resistance class indicated by the manufacturer	ISO 10545-13 IS 13630 (Part 7)

PACKING DETAILS

SIZE	PIECES / BOX	COVERAGE AREA / BOX	WEIGHT / BOX
60x120cm	2	1.44 sq. mtr / 15.50 sq. ft.	47 kg (Approx)

Note: 1) Color shown in catalog may vary with the original tile. Slight shade & size variation is an inherent property of Ceramic / Vitrified tiles.
2)The M.O.R. and Breaking Strength will be well above the minimum required values.

SUNHEARRT
CERAMIX

TILES | BATHWARE | ADHESIVE

SUNHEARRT CERAMIX PRIVATE LIMITED
(Formerly Known as Sunshine Tiles Company Pvt. Ltd.)
101-103, First Floor, Titanium One, Near Pakwan Cross Roads, S. G. Highway, Ahmedabad - 380 054. Gujarat, INDIA
T. +91-79-29704833, +91-79-61554444 | **E.** info@sunhearrt.com

COMPANY EXPERIENCE CENTRE
"Sunhearrt Ceramix" Unit-1, S.No. 150 & 160/P1,
8-A-National Highway, At. Dhuva, Tal, Wankaner,
Dist. Morbi - 363621 (Gujarat)

BENGALURU OFFICE
150 Rashtriya Vidyalay Road, Nr. Minerva Circle,
Vishweshwarapura, Mavalli, Bangalore - 560004 (Karnataka)
T. +91-95120 00270 | **E.** showroom1.ka@sunhearrt.com

MUMBAI OFFICE
301/A, 3rd Floor, Sri Krishna, Opp. Laxmi Industrial Estate,
New Link Road, Andheri (W) Mumbai - 400053 (Maharashtra)
T. +91-99099 80498 | **E.** showroom1.mh@sunhearrt.com

CHENNAI OFFICE
"Megh Towers" Old No. 307, New No. 165,
Poonamallee High Road, Maduravoyal, Chennai - 600095 (Tamilnadu)
T. +91-70944 39491 | **E.** showroom2.tn@sunhearrt.com

DELHI OFFICE
D-1, Mansarovar Garden, New Delhi-110015
T. +91-95120 00324
E. showroom1.dl@sunhearrt.com

COCHIN OFFICE
Jacob's Building, 1st Floor, Nh Bye Pass-66,
Geethanjali Bus Stop, Vyttila, Kerla-682024
T. +91-99099 88625 | **E.** showroom1.kl@sunhearrt.com

INTERNATIONAL ENQUIRY
T. +91-99099 88489 | **E.** export@sunhearrt.com

TOLL FREE: 1800 233 1012
E. info@sunhearrt.com | **www.sunhearrt.com**

IS 15622 CML-7600073812 | IGBC | 3 STAR | ISO 9001:2015 | CE | MAKE IN INDIA

09.26